


12576

Model Number: 2VHVR200-102D20DST6
Category: Metered
Sub Category: Standard
Power Configuration: 20A, 208V, 3.3kW
Physical Configuration: 2U 19 in / 483 mm, Horizontal

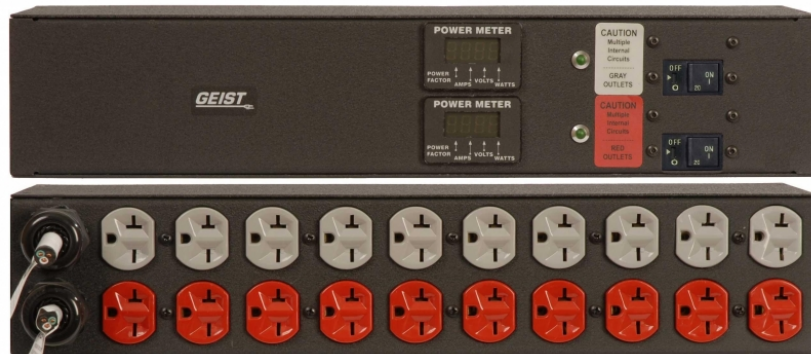

Description: The 12576 is a PDU equipped with a local power meter displaying real-time power metrics. This metered PDU is ideal for installations in facilities with proper surge protection at the main electrical service entrance.

Product Summary: 12576 - Metered, Standard, 20A, 208V, Horizontal, (20) NEMA 6-20R, breakered, 10 ft power cords with 6-20P, Power - Local (A, V, W, PF)
 Digital RMS Scrolling Power Meter +/- 2% Accuracy with Full Scale 60Hz sine wave input. Black Powder Coat.

Monitoring: Power - Local (A, V, W, PF)
 Digital RMS Scrolling Power Meter +/- 2% Accuracy with Full Scale 60Hz sine wave input

Plug Form:



6-20P

Receptacle:



NEMA 6-20R
 (Quantity: 20)

Chassis Colors Options:

Geist Americas

800.432.3219
 geistglobal.com

Geist DCIM
 1.877.449.4150
 geistglobal.com

Geist Europe

+44 (0) 1823.275100
 geistglobal.com

Geist Asia

China
 +86.755.86639505
 geistglobal.com



To discuss color options, contact your local sales representative.

Geist Americas

800.432.3219
geistglobal.com

Geist DCIM
1.877.449.4150
geistglobal.com

Geist Europe

+44 (0) 1823.275100
geistglobal.com

Geist Asia

China
+86.755.86639505
geistglobal.com

Product Specification and Options:

Monitoring	Power - Local (A, V, W, PF) Digital RMS Scrolling Power Meter +/- 2% Accuracy with Full Scale 60Hz sine wave input
Monitoring Level 1	Aggregate Circuit Monitoring
Quantity Of Inputs	2 (Dual Input)
Voltage	208V
Current	20A
VA per Input (Load Capacity)	3.3kW (x2)
Frequency	50/60 Hz
Over Current Protection	(2) 20A Double Pole Magnetic Breakers
Switch	Breaker/Switch Combination
Power Cable Wire Gauge	12/3
Power Cable Length	10ft
Plug Type	(2) NEMA 6-20P
Receptacle/Socket Type #1	NEMA 6-20R
- Quantity on Rear	20
- Quantity per Breaker	10
- Style	Duplex
- Maximum Output per Receptacle/Socket	20A
- Voltage per Receptacle/Socket	208V
Continuous Operating Temperature Range	10-45C / 50-113F
Heavy Steel - Powder Coat Finish	Black
Configuration	19 in / 435 mm Horizontal Rackmount
19in Recess Mount	Yes
Made in the USA	Yes
Product Warranty	5-year limited warranty if registered within 120 days of purchase, otherwise warranty defaults to 3 years
Certification/Agency Approvals	RoHS Compliant
Certification/Agency Approvals	UL & c-UL Listed 60950
Chassis Dimensions (HxWxD)	3.39in x 17in x 6in
Shipped Weight	16lbs (7.26kg)

Geist Americas

800.432.3219
geistglobal.com

Geist DCIM
1.877.449.4150
geistglobal.com

Geist Europe

+44 (0) 1823.275100
geistglobal.com

Geist Asia

China
+86.755.86639505
geistglobal.com